

COMMERCIAL/INDUSTRIAL

• **Final color selection should be made from actual color chips.**

- For the most current information available, visit our website at www.mbc.com.
- See product selection chart for gauge and finish availability.
- All products available in smooth or embossed finish.
- Trim available in all colors.
- A 40-year limited paint warranty is available upon written request for all colors except for Crimson Red, Polar White and Brite Red. Please review our sample warranty for complete performance attributes and terms and conditions.

SIGNATURE® 200

STANDARD COLORS
26- AND 24-GAUGE MATERIAL

Siliconized Polyester

Polar White is a Straight Polyester.

* Also available in 29-gauge

** Minimum quantities and/or extended lead times required for 24-gauge. Please inquire.



SIGNATURE® 300

STANDARD COLORS
26-GAUGE MATERIAL
PBR, PBU, AVP, PBC, PBD
PANELS ONLY

* Also available in 24-gauge

** Minimum quantities and/or extended lead times required for 24-gauge. Please inquire.

† Minimum quantities and/or extended lead times required for all gauges. Please inquire.



COLOR CHART

Signature® is a registered trademark of NCI Group, Inc.



* ENERGY STAR® Qualified



SOLAR REFLECTIVITY (SR)?

Solar reflectivity or reflectance (SR) is the ability of a material to reflect solar energy from its surface back into the atmosphere. The SR value is a number from 0 to 1.0. A value of 0 indicates that the material absorbs all solar energy and a value of 1.0 indicates it is all reflected. Energy Star requires SR testing of both new and aged roof products. New products must have an SR value of 0.25 or higher for steep slope (above 2:12) roofing and an SR value of 0.65 or higher for low slope (2:12 or less) roofing. Aged testing takes 3 years to complete, so not all products that meet the initial requirements are qualified. For more information, please go to www.energystar.gov.




SOLAR REFLECTANCE INDEX (SRI)?

The SRI is used to determine compliance with LEED requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. Emissivity is a material's ability to release absorbed energy. To meet LEED requirements, a roofing material must have an SRI of 29 or higher for steep slope (above 2:12) roofing and an SRI value of 78 or higher for low slope (2:12 or less) roofing. For more information, please go to www.usgbc.org.


PANEL PROFILE	Panel	29 GAUGE		26 GAUGE			24 GAUGE			22 GAUGE	
		Galvalume Plus	Sig 200	Galvalume Plus	Sig 200	Sig 300	Galvalume Plus	Sig 200	Sig 300	Galvalume Plus	Sig 200
<p>"PBR" PANEL</p>	PBR	●	■	●	●	■	■	■	■	●	■
<p>"PBU" PANEL</p>	PBU	●	■	●	●	■	■	■	■	●	■
<p>"PBC" PANEL</p>	PBC	●	■	●	●	■	■	■	■	●	■
<p>"PBD" PANEL</p>	PBD	●	■	●	●	■	■	■	■	●	■
<p>7.2 PANEL</p>	7.2	●	■	●	■	■	■	■	■	●	■
<p>"AVP" PANEL</p>	AVP	●	■	●	●	■	■	■	■	●	■

● Available in any quantity ■ May require minimum quantity

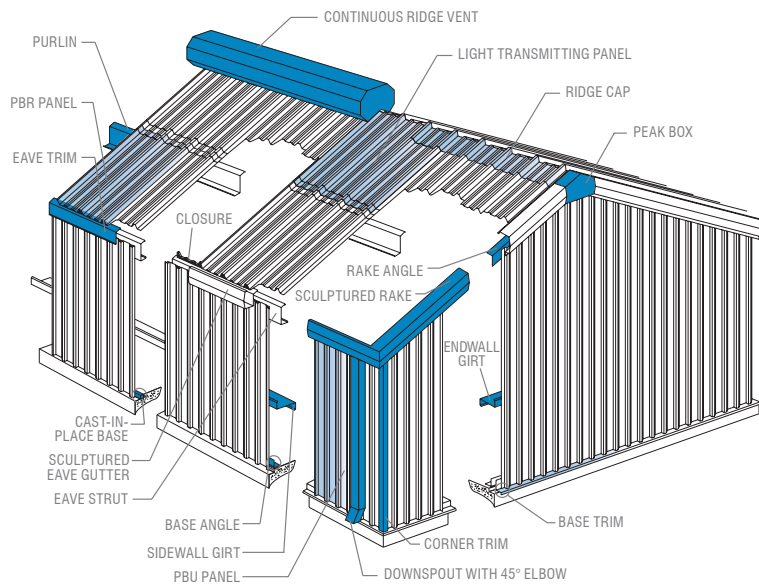

AVAILABLE ACCESSORIES

- Hat and Channel Sections
- Light Transmitting Panels
- Vents
- Roof Jacks
- Fasteners
- Ridge Caps
- Closures
- Doors
- Windows
- Sealants
- Insulation
- Bracing
- Bolts
- Louvers
- Sliding Door Hardware

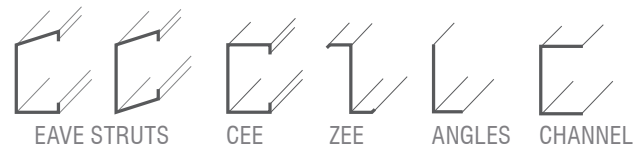

For complete performance specifications, product limitations and disclaimers, please consult MBCI's Paint and Galvalume Plus® warranties. Upon receipt of payment in full, these warranties are available upon request for all painted or Galvalume Plus®, prime products. Sample copies can be found at www.mbcicom or contact your local MBCI Sales Representative.

FOR THE MOST CURRENT INFORMATION AVAILABLE, VISIT OUR WEBSITE AT WWW.MBCI.COM

Houston, TX | 877.713.6224
 Adel, GA | 888.446.6224
 Atlanta, GA | 877.512.6224
 Atwater, CA | 800.829.9324
 Dallas, TX | 800.653.6224

Indianapolis, IN | 800.735.6224
 Lubbock, TX | 800.758.6224
 Memphis, TN | 800.206.6224
 Oklahoma City, OK | 800.597.6224
 Omaha, NE | 800.458.6224

Phoenix, AZ | 888.533.6224
 Richmond, VA | 800.729.6224
 Rome, NY | 800.559.6224
 Salt Lake City, UT | 800.874.2404
 San Antonio, TX | 800.598.6224

